

# Keysight Technologies N7711A, N7714A Tunable Laser Sources

Data Sheet



## Introduction

The Keysight Technologies, Inc. N7711A and N7714A tunable lasers are single-port and four-port sources, available with C-band or L-band wavelength coverage. With high output power up to +15 dBm, narrow linewidth of 100 kHz, gridless and grid-defined wavelength setting, and offset fine-tuning capability, the N7711A and N7714A make them ideal sources for realistic loading of the latest transmission systems.

To owners of Keysight's proven Lightwave Measurement System the 81950A tunable laser source module offers the same features as the N7711A. The 81950A plugs into the 8163B and 8164B mainframes. For additional information about the 81950A please refer to the Compact Tunable Laser data sheet, publication no. 5988-8518EN.

## Seamless wavelength coverage

The new options 3xx remove the wavelength gap between the C-band and L-band channels.

## Operation Modes

When operated in gridless mode, the wavelength can be set anywhere within its range using the same commands as with other Keysight tunable lasers.

In system loading applications, it may be preferable to grid-tune the lasers like system transmitters, simply by changing the channel index. The channel grid is adjustable to standard ITU-T grid spacing like 50 GHz, and to arbitrary grids. Likewise, the zero frequency (base channel) of the chosen grid is adjustable. A 12 GHz fine-tuning range allows adjustment of the frequency without interrupting the laser output.

## Key specifications and features

- Compact instrument format with one or four ports per unit on one-half 19-inch width and one-unit height;
- Flexible configuration of four-port model between C- and L-band channels (N7714A);
- Adjustable to any wavelength grid (ITU-T 100 GHz, 50 GHz, 25 GHz, and arbitrary grids); and gridless tuning;
- Narrow linewidth less than 100 kHz and offset-grid tuning greater than  $\pm 6$  GHz ideally suited for coherent mixing applications and new complex modulation formats; and
- Up to +15 dBm output power, with 8 dB power adjustment range.
- Equipped with Panda polarization maintaining fiber.

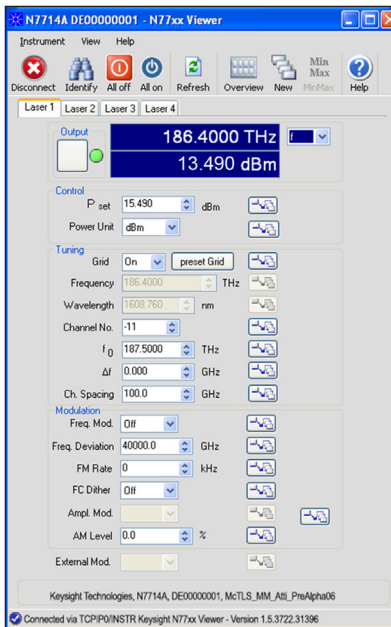


Figure 1. Graphical user interface

## The 77-Series Optical Test Instruments

Targeted for high test throughput, lowest cost-per-channel, and narrow footprint, all members of Keysight's 77-Series optical test instruments are built on a common platform and a common PC-based user interface. A complete set of control interfaces including LAN, USB2.0 and GPIB simplifies integration with manufacturing control systems. Code compatible to Keysight's Lightwave Measurement System modules, the new instrument generation can serve as plug-in replacements in existing test solutions.

All 77-series optical test instruments share:

- “just-enough-test” approach with lowest hardware overhead;
- LAN, USB and GPIB interfaces;
- Built-in international power supply;
- SCPI command set, compatible with existing instrument categories for easy drop-in replacement; and
- Keysight IO libraries and a PC-based graphical user interface.

## The N77-Viewer: An easy-to-use graphical user interface

The N77's Window's based graphical user interface offers flexible and extensive control of the instrument.

- Easy switching between channels with tabs.
- Overview window with all channels at a glance.
- Two instrument configurations can be stored and recalled.
- Turn on and off the laser output with one click.
- Choose between setting a laser's wavelength, frequency, channel or its output power.

## Technical specifications

Specifications apply to wavelengths on the 50 GHz ITU-T grid, after 1 hour warm-up, in non-condensing conditions, in CW operation.

Parameter	Keysight N7711A, N7714A	
Wavelength	Options #310, #322, #340	Options #301, #322, #304
Wavelength (frequency) range	1527.60 nm to 1570.01 nm (196.25 THz to 190.95 THz)	1570.01 nm to 1611.76 nm (190.95 THz to 186.00 THz)
Frequency (wavelength) resolution	100 MHz (0.8 pm at 1550 nm)	
Fine tuning range	Typical $\pm 6$ GHz	
Fine tuning resolution	Typical 1 MHz	
Absolute wavelength (frequency) accuracy	$\pm 22$ pm ( $\pm 2.5$ GHz)	
Relative wavelength (frequency) accuracy	$\pm 12$ pm ( $\pm 1.5$ GHz)	
Wavelength (frequency) repeatability	Typical $\pm 2.5$ pm ( $\pm 0.3$ GHz) <sup>2</sup>	
Wavelength (frequency) stability	Typical $\pm 2.5$ pm ( $\pm 0.3$ GHz), 24 hours <sup>2</sup> Typical $\pm 0.5$ pm, 1 minute <sup>2</sup>	
Tuning time	Typical < 30 sec <sup>3</sup>	
Optical power	Options #310, #322, #340	Options #301, #322, #304
Max. output power	$\geq +13.5$ dBm Typical $\geq +15$ dBm	$\geq +11.5$ dBm Typical $\geq +13$ dBm
Power stability	Typical $\pm 0.03$ dB over 24 hours <sup>2</sup> Typical $\pm 0.03$ dB over 1 hour <sup>2</sup>	
Power flatness	Typical $\pm 0.2$ dB (full wavelength range)	
Power repeatability	Typical $\pm 0.08$ dB <sup>2</sup>	
Spectral		
Linewidth	Typical < 100 kHz (SBS suppression off)	
Side mode suppression ratio (SMSR)	Typical 50 dB	
Source spontaneous emission (SSE)	Typical 50 dB/ 1 nm <sup>1</sup> Typical 60 dB/ 0.1 nm <sup>1</sup>	
Relative intensity noise (RIN)	Typical -145 dB/Hz <sup>1</sup> (10 MHz to 40 GHz)	

<sup>1</sup> At maximum specified output power as specified per wavelength range

<sup>2</sup> At constant temperature  $\pm 0.5$  K


<sup>3</sup> Including power stabilization

## Supplementary Performance Characteristics, Non-warranted

Parameter	Keysight N7711A, N7714A
Grid spacing	100 GHz, 50 GHz, 25 GHz, or arbitrary grid
Fine tuning speed	15 sec from -6 GHz to +6 GHz
Warm-up time	1 hour, immediate operation after boot-up
<b>Output power</b>	
Power attenuation range	8 dB
Power setting resolution	0.1 dB
Residual output power (shutter closed)	$\leq -45$ dBm
<b>Stimulated Brillouin scattering suppression</b>	
SBS suppression FM p-p modulation range	0 GHz to 1 GHz
SBS suppression dither frequency	20.8 kHz

## General Characteristics

Parameter	Keysight N7711A, N7714A
Connectivity	FC/APC angled (option #072) or FC/PC straight (option #071) connector interface
Fiber type	9/125 $\mu$ m panda PMF, TE mode in slow axis, in line with connector key
Polarization extinction ratio	16 dB typical
Output isolation	30 dB typical
Laser safety	Class 1M
Recommended recalibration period	24 months
Operating conditions	+10 °C to +35 °C < 80% relative humidity, non-condensing
Altitude	Max 2000 m
Pollution protection	Designed for pollution detection degree 2
Storage conditions	-40 °C to +70 °C < 80% relative humidity, non-condensing
Form factor	One rack unit, 1/2 19" width
Dimensions (H x W x D)	43 mm x 212 mm x 372 mm
Weight	3.8 kg (6 lbs)
Front panel	Status LEDs, laser on/off buttons, line power on/off switch
Connectivity, rear panel	USB 2.0, LAN 10/100 Mbit/s, GPIB
User interface	PC user interface application, SCPI commands, Keysight IO libraries
Power consumption	AC 100-240 V $\pm$ 10%, 50 Hz/60 Hz, 60 VA maximum
Laser safety information	All laser sources specified by this data sheet are classified as Class 1M according to IEC 60825-1 (2007).

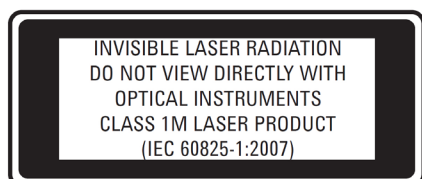

All laser sources comply with 21 CFR 1040.10 except for deviations pursuant to Laser Notice No. 50, dated 2007, June 24.

## Ordering Information

<b>Model number</b>	
N7711A	Tunable laser source, 1 port
N7714A	Tunable laser source, 4 ports
<b>Connector interface option</b>	
-071	Straight connector interface, PMF
-072	Angled connector interface, PMF
<b>Wavelength (frequency) option</b>	
<b>N7711A</b>	
-310	C-band laser
-301	L-band laser
<b>N7714A</b>	
-340	4 C-band lasers
-304	4 L-band lasers
-322	2 C-band lasers and 2 L-band lasers
<b>Accessories</b>	
N7744-100	Rack mount kit for 1 or 2 units
<b>Calibration</b>	
<b>Select Keysight calibration plan</b>	
R-50C-011-3	3-year calibration assurance plan (return to Keysight): Priority calibration service covering all calibration costs for 3 years; 15% cheaper than buying stand-alone calibrations.
R-50C-011-5	5-year calibration assurance plan (return to Keysight): Priority calibration service covering all calibration costs for 5 years; 20% cheaper than buying stand-alone calibrations.

## Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.



For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at:

[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

### Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

### Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:

[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
(BP-9-7-17)

**DEKRA Certified**  
ISO 9001 Quality Management System

[www.keysight.com/go/quality](http://www.keysight.com/go/quality)  
Keysight Technologies, Inc.  
DEKRA Certified ISO 9001:2015  
Quality Management System

### myKeysight

#### myKeysight

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.

[http://www.keysight.com/find/emt\\_product\\_registration](http://www.keysight.com/find/emt_product_registration)

Register your products to get up-to-date product information and find warranty information.

### KEYSIGHT SERVICES

Accelerate Technology Adoption.  
Lower costs.

#### Keysight Services

[www.keysight.com/find/service](http://www.keysight.com/find/service)

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



#### Keysight Assurance Plans

[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

#### Keysight Channel Partners

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

[www.keysight.com/find/n7714a](http://www.keysight.com/find/n7714a)



Unlocking Measurement Insights

This information is subject to change without notice.

© Keysight Technologies, 2017  
Published in USA, December 1, 2017  
5990-5512EN

[www.keysight.com](http://www.keysight.com)